

**DIPLOMADO DE PROFUNDIZACIÓN CISCO (DISEÑO E IMPLEMENTACIÓN DE
SOLUCIONES INTEGRADAS LAN / WAN)**

Prueba de Habilidades CCNA2

Presentado Por.
STEFANY ROCIO GUTIERREZ

Grupo: 203092_18

Presentado a:
Juan Carlos Vesga
Director

UNIVERSIDAD NACIONAL ABIERTA Y A DISTANCIA ESCUELA DE CIENCIAS
BASICAS, TECNOLOGÍA E INGENIERÍA
PROGRAMA INGENIERÍA DE SISTEMAS
2018


Introducción

El presente trabajo se realiza con el fin de demostrar y aplicar los conocimientos adquiridos al cursar el módulo CCNA 2, para mostrar como un administrador de red de una empresa de Tecnología configura e interconectar entre sí tres sucursales distribuidas en las ciudades de Miami, Bogotá y Buenos Aires.

Las redes cambian nuestra forma de vivir, trabajar y divertirnos. Las redes permiten a las personas comunicarse, colaborar e interactuar de maneras totalmente novedosas. Utilizamos la red de distintas formas, entre ellas las aplicaciones Web, la telefonía IP, la videoconferencia, los juegos interactivos, el comercio electrónico, la educación y más.

Desarrollo

Escenario 2

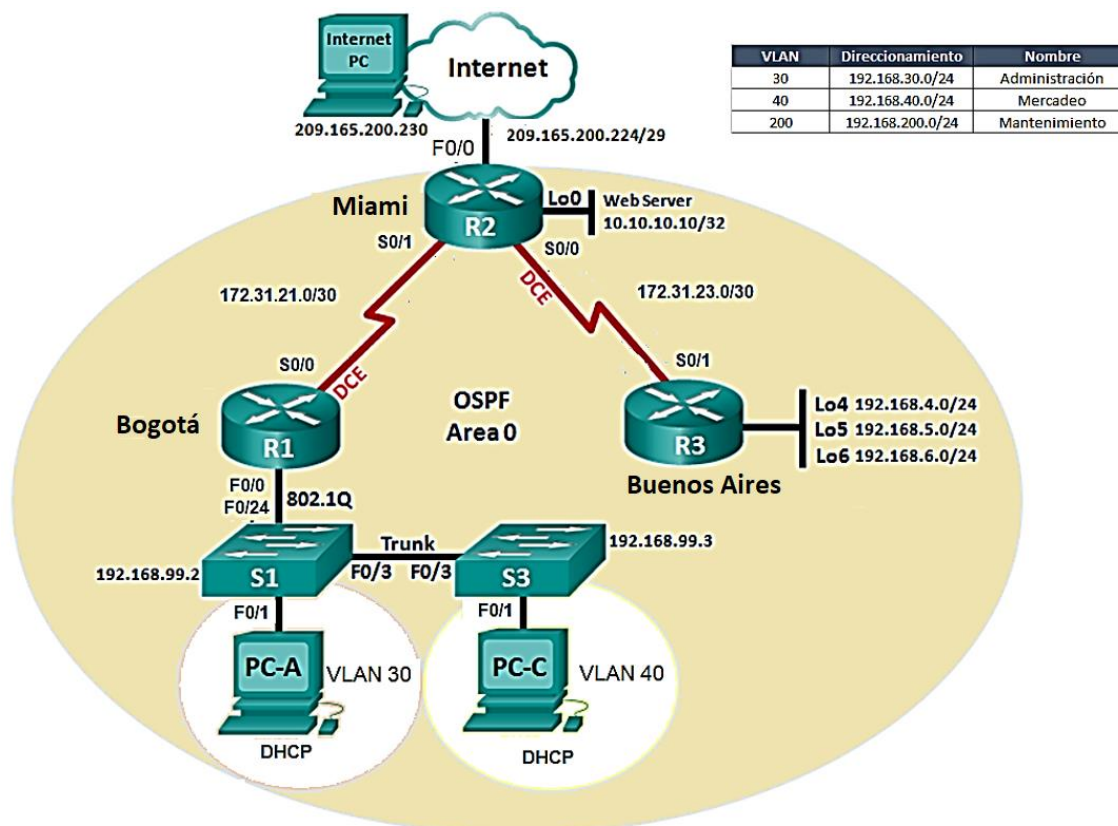

2. DIRECCIONAMIENTO DE RED

2.1 TABLA DE DIRECCIONAMIENTO IP ASIGNADO

El direccionamiento IP asignado a los equipos que conforman el escenario de red propuesto se resumen a continuación:

Tabla 1. Direccionamiento de IP de equipos de red

| DISPOSITIVO | INTERFACE | DIRECCION IP | MASCARA DE SUBRED |
|-------------------|-----------|-----------------|-------------------|
| ROUTER ISP | GI 0/0 | 209.165.200.230 | 255.255.255.248 |

| | | | |
|------|------------|-----------------|-----------------|
| R2 | FA 0/0 | 209.165.200.225 | 255.255.255.248 |
| R2 | S0/0/0 | 172.31.23.1 | 255.255.255.252 |
| R2 | S0/0/1 | 172.31.21.2 | 255.255.255.252 |
| R2 | Lo0 | 10.10.10.10 | 255.255.255.255 |
| R1 | S 0/0/0 | 172.31.21.1 | 255.255.255.252 |
| R1 | FA 0/0.30 | 192.168.30.1 | 255.255.255.0 |
| R1 | FA 0/0.40 | 192.168.40.1 | 255.255.255.0 |
| R1 | FA 0/0.200 | 192.168.200.1 | 255.255.255.0 |
| R1 | FA 0/0.99 | 192.168.99.1 | 255.255.255.0 |
| R3 | S0/0/1 | 172.31.23.2 | 255.255.255.252 |
| R3 | Lo4 | 192.168.4.1 | 255.255.255.0 |
| R3 | Lo5 | 192.168.5.1 | 255.255.255.0 |
| R3 | Lo6 | 192.168.6.1 | 255.255.255.0 |
| SW1 | Vlan 99 | 192.168.99.2 | 255.255.255.0 |
| SW3 | Vlan 99 | 192.168.99.3 | 255.255.255.0 |
| PC-A | Vlan 30 | Dinámica | Dinámica |
| PC-C | Vlan 40 | Dinámica | Dinámica |

3. CONFIGURACIÓN Y VERIFICACIÓN PROTOCOLO OSPF V2

3.1 TABLA DE ENRUTAMIENTO Y ROUTERS CONECTADOS POR OSPF

3.1.1 Router 1

```

R1#sh ip ro
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

  10.0.0.0/32 is subnetted, 1 subnets
O       10.10.10.10 [110/7501] via 172.31.21.2, 00:23:32, Serial0/0/0
  172.31.0.0/30 is subnetted, 2 subnets
C       172.31.21.0 is directly connected, Serial0/0/0
O       172.31.23.0 [110/15000] via 172.31.21.2, 00:23:32, Serial0/0/0
  192.168.4.0/32 is subnetted, 1 subnets
O       192.168.4.1 [110/15001] via 172.31.21.2, 00:23:22, Serial0/0/0
  192.168.5.0/32 is subnetted, 1 subnets
O       192.168.5.1 [110/15001] via 172.31.21.2, 00:23:22, Serial0/0/0
  192.168.6.0/32 is subnetted, 1 subnets
O       192.168.6.1 [110/15001] via 172.31.21.2, 00:23:22, Serial0/0/0
C       192.168.30.0/24 is directly connected, FastEthernet0/0.30
C       192.168.40.0/24 is directly connected, FastEthernet0/0.40
C       192.168.99.0/24 is directly connected, FastEthernet0/0.99

```


3.1.2 Router 2

```

R2#sh ip ro
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is 209.165.200.230 to network 0.0.0.0

 10.0.0.0/32 is subnetted, 1 subnets
C    10.10.10.10 is directly connected, Loopback0
 172.31.0.0/30 is subnetted, 2 subnets
C    172.31.21.0 is directly connected, Serial0/0/1
C    172.31.23.0 is directly connected, Serial0/0/0
 192.168.4.0/32 is subnetted, 1 subnets
O    192.168.4.1 [110/7501] via 172.31.23.2, 00:24:52, Serial0/0/0
 192.168.5.0/32 is subnetted, 1 subnets
O    192.168.5.1 [110/7501] via 172.31.23.2, 00:24:52, Serial0/0/0
 192.168.6.0/32 is subnetted, 1 subnets
O    192.168.6.1 [110/7501] via 172.31.23.2, 00:24:52, Serial0/0/0
O    192.168.30.0/24 [110/782] via 172.31.21.1, 00:24:52, Serial0/0/1
O    192.168.40.0/24 [110/782] via 172.31.21.1, 00:24:52, Serial0/0/1
O    192.168.99.0/24 [110/782] via 172.31.21.1, 00:24:52, Serial0/0/1
O    192.168.200.0/24 [110/782] via 172.31.21.1, 00:24:52, Serial0/0/1
209.165.200.0/29 is subnetted, 1 subnets
C    209.165.200.224 is directly connected, FastEthernet0/0
S*   0.0.0.0/0 [1/0] via 209.165.200.230

R2#

```

3.1.3 Router 3

```

R3#sh ip ro
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

 10.0.0.0/32 is subnetted, 1 subnets
O    10.10.10.10 [110/782] via 172.31.23.1, 00:29:27, Serial0/0/1
 172.31.0.0/30 is subnetted, 2 subnets
O    172.31.21.0 [110/1562] via 172.31.23.1, 00:29:27, Serial0/0/1
C    172.31.23.0 is directly connected, Serial0/0/1
C    192.168.4.0/24 is directly connected, Loopback4
C    192.168.5.0/24 is directly connected, Loopback5
C    192.168.6.0/24 is directly connected, Loopback6
O    192.168.30.0/24 [110/1563] via 172.31.23.1, 00:29:27, Serial0/0/1
O    192.168.40.0/24 [110/1563] via 172.31.23.1, 00:29:27, Serial0/0/1
O    192.168.99.0/24 [110/1563] via 172.31.23.1, 00:29:27, Serial0/0/1
O    192.168.200.0/24 [110/1563] via 172.31.23.1, 00:29:27, Serial0/0/1
209.165.200.0/29 is subnetted, 1 subnets
O    209.165.200.224 [110/782] via 172.31.23.1, 00:29:27, Serial0/0/1

R3#

```

3.2 CONFIGURACIÓN OSPF (PROCESS ID, INTERFACES, ROUTER ID, INTERFACES COSTO)

3.2.1 Router 1

```

FastEthernet0/0.30 is up, line protocol is up
  Internet address is 192.168.30.1/24, Area 0
  Process ID 1, Router ID 1.1.1.1, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DR, Priority 1
  Designated Router (ID) 1.1.1.1, Interface address 192.168.30.1
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    Hello due in 00:00:07
  Index 1/1, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 0, Adjacent neighbor count is 0
  Suppress hello for 0 neighbor(s)
FastEthernet0/0.40 is up, line protocol is up
  Internet address is 192.168.40.1/24, Area 0
  Process ID 1, Router ID 1.1.1.1, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DR, Priority 1
  Designated Router (ID) 1.1.1.1, Interface address 192.168.40.1
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    Hello due in 00:00:07
  Index 2/2, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 0, Adjacent neighbor count is 0
  Suppress hello for 0 neighbor(s)
FastEthernet0/0.99 is up, line protocol is up
  Internet address is 192.168.99.1/24, Area 0
  Process ID 1, Router ID 1.1.1.1, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DR, Priority 1
  Designated Router (ID) 1.1.1.1, Interface address 192.168.99.1
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    Hello due in 00:00:07
  Index 3/3, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 0, Adjacent neighbor count is 0
  Suppress hello for 0 neighbor(s)
FastEthernet0/0.200 is up, line protocol is up
  Internet address is 192.168.200.1/24, Area 0
  Process ID 1, Router ID 1.1.1.1, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DR, Priority 1
  Designated Router (ID) 1.1.1.1, Interface address 192.168.200.1
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    Hello due in 00:00:07
  Index 4/4, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 0, Adjacent neighbor count is 0
  Suppress hello for 0 neighbor(s)
Serial0/0/0 is up, line protocol is up
  Internet address is 172.31.21.1/30, Area 0
  Process ID 1, Router ID 1.1.1.1, Network Type POINT-TO-POINT, Cost: 7500
  Transmit Delay is 1 sec, State POINT-TO-POINT, Priority 0

```

3.2.2 Router 2

```

R2#sh ip ospf interface
Loopback0 is up, line protocol is up
  Internet address is 10.10.10.10/32, Area 0
  Process ID 1, Router ID 3.3.3.3, Network Type LOOPBACK, Cost: 1
  Loopback interface is treated as a stub Host
FastEthernet0/0 is up, line protocol is up
  Internet address is 209.165.200.225/25, Area 0
  Process ID 1, Router ID 3.3.3.3, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DR, Priority 1
  Designated Router (ID) 3.3.3.3, Interface address 209.165.200.225
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  No Hellos (Passive interface)
  Index 3/2, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 0, Adjacent neighbor count is 0
  Suppress hello for 0 neighbor(s)
Serial0/0/0 is up, line protocol is up
  Internet address is 172.31.23.1/30, Area 0
  Process ID 1, Router ID 3.3.3.3, Network Type POINT-TO-POINT, Cost: 7500
  Transmit Delay is 1 sec, State POINT-TO-POINT, Priority 0
  No designated router on this network
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  Hello due in 00:00:03
  Index 3/3, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 1, Adjacent neighbor count is 1
  Adjacent with neighbor 3.3.3.3
  Suppress hello for 0 neighbor(s)
Serial0/0/1 is up, line protocol is up
  Internet address is 172.31.21.2/30, Area 0
  Process ID 1, Router ID 3.3.3.3, Network Type POINT-TO-POINT, Cost: 781
  Transmit Delay is 1 sec, State POINT-TO-POINT, Priority 0
  No designated router on this network
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  Hello due in 00:00:09
  Index 4/4, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 1, Adjacent neighbor count is 1
  Adjacent with neighbor 1.1.1.1
  Suppress hello for 0 neighbor(s)

```


3.2.3 Router 3

```
R3#sh ip ospf interface s0/0/1
Serial0/0/1 is up, line protocol is up
Internet address is 172.31.23.2/30, Area 0
Process ID 1, Router ID 3.3.3.3, Network Type POINT-TO-POINT, Cost: 781
Transmit Delay is 1 sec, State POINT-TO-POINT, Priority 0
No designated router on this network
No backup designated router on this network
Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  Hello due in 00:00:03
Index 4/4, flood queue length 0
Next 0x0(0)/0x0(0)
Last flood scan length is 1, maximum is 1
Last flood scan time is 0 msec, maximum is 0 msec
Neighbor Count is 1, Adjacent neighbor count is 1
  Adjacent with neighbor 2.2.2.2
Suppress hello for 0 neighbor(s)
R3#sh ip ospf ?
<1-65535>      Process ID number
border-routers Border and Boundary Router Information
database       Database summary
interface      Interface information
neighbor       Neighbor list
virtual-links  Virtual link information
<cr>
```

4. CONFIGURACIÓN DE VLANS, PUERTOS TRONCALES, PUERTOS DE ACCESO, ENCAPSULAMIENTO, INTER-VLAN ROUTING

4.1 Router 1

En R1 se llevó a cabo la configuración del enrutamiento inter-vlan y la respectiva encapsulación.

```
interface FastEthernet0/0
description LAN
no ip address
duplex auto
speed auto
!
interface FastEthernet0/0.30
description VLAN Administracion
encapsulation dot1Q 30
ip address 192.168.30.1 255.255.255.0
ip access-group 102 out
!
interface FastEthernet0/0.40
description VLAN Mercadeo
encapsulation dot1Q 40
ip address 192.168.40.1 255.255.255.0
ip access-group 101 out
!
interface FastEthernet0/0.99
description VLAN Management
encapsulation dot1Q 99
ip address 192.168.99.1 255.255.255.0
!
interface FastEthernet0/0.200
description VLAN Mantenimiento
encapsulation dot1Q 200
ip address 192.168.200.1 255.255.255.0
ip access-group 21 out
!
interface FastEthernet0/1
no ip address
duplex auto
speed auto
shutdown
```

4.2 SW1

En el switch 1 se llevó a cabo a configuración de puertos troncales (conexión a router 1 y conexión a SW3), puerto de acceso, conexión a PC-A

Puerto de acceso:

```
!
interface FastEthernet0/1
description PC VLAN 30
switchport access vlan 30
switchport mode access
spanning-tree portfast
```

Puertos troncales:

```
SW1#sh inter trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/3     on        802.1q         trunking    1
Fa0/24    on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/3     1-1005
Fa0/24    1-1005

Port      Vlans allowed and active in management domain
Fa0/3     1,30,40,99,200
Fa0/24    1,30,40,99,200

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/3     1,30,40,99,200
Fa0/24    1,30,40,99,200
```

4.3 SW3

En el SW3 se configuró el puerto de acceso para la conexión a PC – C y un puerto troncal que conecta a SW1.

Puerto de acceso:

```
!
interface FastEthernet0/1
description PC VLAN 40
switchport access vlan 40
switchport mode access
spanning-tree portfast
```

Puertos troncales:

```

SW3#sh int trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/3     on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/3     1-1005

Port      Vlans allowed and active in management domain
Fa0/3     1,30,40,99,200

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/3     1,30,40,99,200

```

5. DESHABILITAR DNS LOOKUP EN SW3

5.1 SW3

Se llevó a cabo la configuración requerida mediante el comando que se ilustra en la imagen:

```

ip domain-lookup
no ip domain-lookup

```

6. ASIGNACIÓN DE DIRECCIONES IP A SWITCHES

Para la administración de los switches se llevó a cabo la creación de la vlan 99 para gestionar los equipos, como buena práctica se evitó usar la vlan 1 para administrar los equipos, en la tabla se resumen el direccionamiento IP asignado a los dispositivos.

Tabla 2. Direccionamiento de IP asignado switches

| DISPOSITIVO | INTERFACE | DIRECCION IP | MASCARA DE SUBRED |
|-------------|-----------|--------------|-------------------|
| SW1 | Vlan 99 | 192.168.99.2 | 255.255.255.0 |
| SW3 | Vlan 99 | 192.168.99.3 | 255.255.255.0 |

7.CONFIGURACIÓN DE DHCP

La configuración del protocolo DHCP para las vlan 30 y 40 se llevó a cabo en el R1, inicialmente se configuró en el dispositivo los rangos de IP que debían excluirse y posteriormente se asignaron los parámetros propuestos en el escenario.

```

!
ip dhcp excluded-address 192.168.30.1 192.168.30.30
ip dhcp excluded-address 192.168.40.1 192.168.40.30
!
ip dhcp pool ADMINISTRACION
 network 192.168.30.0 255.255.255.0
 default-router 192.168.30.1
 dns-server 10.10.10.11
ip dhcp pool MERCADEO
 network 192.168.40.0 255.255.255.0
 default-router 192.168.40.1
 dns-server 10.10.10.11

```

8.CONFIGURACIÓN DE NAT

```

!
ip nat inside source list 10 interface FastEthernet0/0 overload
ip classless
ip route 0.0.0.0 0.0.0.0 209.165.200.230
!
ip flow-export version 9
!
access-list 10 permit 172.31.21.0 0.0.0.3
access-list 10 permit 172.31.23.0 0.0.0.3
access-list 10 permit host 10.10.10.10
access-list 10 permit 192.168.30.0 0.0.0.255
access-list 10 permit 192.168.40.0 0.0.0.255
access-list 10 permit 192.168.200.0 0.0.0.255
access-list 10 permit 192.168.4.0 0.0.0.255
access-list 10 permit 192.168.5.0 0.0.0.255
access-list 10 permit 192.168.6.0 0.0.0.255
!
interface FastEthernet0/0
 description Enlace_ISP
 ip address 209.165.200.225 255.255.255.248
 ip nat outside
 duplex auto
 speed auto
!

```

```

interface Serial0/0/0
description Enlace a R3
bandwidth 128
ip address 172.31.23.1 255.255.255.252
ip ospf cost 7500
ip nat inside
clock rate 4000
!
interface Serial0/0/1
description Enlace a R1
bandwidth 128
ip address 172.31.21.2 255.255.255.252
ip nat inside

```

9. CONFIGURACIÓN DE ACL ESTÁNDAR

ACL20: Esta lista de acceso aplicada en R3 deniega el tráfico de la red 192.168.6.0/24 hacia el R2

```

access-list 20 deny 192.168.6.0 0.0.0.255
access-list 20 permit host 0.0.0.0

```

```

!
interface Serial0/0/1
description Enlace a R2
bandwidth 128
ip address 172.31.23.2 255.255.255.252
ip access-group 20 out

```

ACL1: Esta lista de acceso aplicada en R1 deniega el tráfico de la red 192.1068.200.0/24 hacia las redes de R2,

```

access-list 21 deny 192.168.200.0 0.0.0.255
access-list 21 permit host 0.0.0.0

```

```

interface FastEthernet0/0.200
description VLAN Mantenimiento
encapsulation dot1Q 200
ip address 192.168.200.1 255.255.255.0
ip access-group 21 out

```

10. CONFIGURACIÓN DE ACL EXTENDIDA

Se crearon dos listas de acceso extendidas en R1: La ACL 101 deniega el tráfico de la red 192.168.40.0/24 hacia la red de internet 209.165.200.224/29 y la ACL 102 deniega el tráfico de la red 192.168.30.0/24 hacia el servidor web con la IP 10.10.10.10. Todo el tráfico restante es permitido.

```

access-list 101 deny ip 192.168.40.0 0.0.0.255 209.165.200.224 0.0.0.7
access-list 101 permit ip any any
access-list 102 deny ip 192.168.30.0 0.0.0.255 host 10.10.10.10
access-list 102 permit ip any any

```

```

interface FastEthernet0/0.30
  description VLAN Administracion
  encapsulation dot1Q 30
  ip address 192.168.30.1 255.255.255.0
  ip access-group 102 out
!
interface FastEthernet0/0.40
  description VLAN Mercadeo
  encapsulation dot1Q 40
  ip address 192.168.40.1 255.255.255.0
  ip access-group 101 out
!

```

11. PRUEBAS DE CONECTIVIDAD

Trazas desde la PC-A hacia las redes de R3

```

Packet Tracer PC Command Line 1.0
C:\>tracert 192.168.5.1

Tracing route to 192.168.5.1 over a maximum of 30 hops:

  1  1 ms      0 ms      0 ms      192.168.30.1
  2  1 ms      0 ms      1 ms      172.31.21.2
  3  47 ms     2 ms      1 ms      192.168.5.1

Trace complete.

C:\>tracert 192.168.4.1

Tracing route to 192.168.4.1 over a maximum of 30 hops:

  1  0 ms      0 ms      0 ms      192.168.30.1
  2  1 ms      0 ms      6 ms      172.31.21.2
  3  0 ms      3 ms      2 ms      192.168.4.1

Trace complete.

C:\>tracert 192.168.6.1

Tracing route to 192.168.6.1 over a maximum of 30 hops:

  1  0 ms      1 ms      0 ms      192.168.30.1
  2  1 ms      1 ms      0 ms      172.31.21.2
  3  1 ms      2 ms      0 ms      192.168.6.1

Trace complete.

```

Trazas desde PC – A hacia redes de R2

```

C:\>tracert 209.165.200.225

Tracing route to 209.165.200.225 over a maximum of 30 hops:

  1  0 ms      0 ms      0 ms      192.168.30.1
  2  1 ms      4 ms      0 ms      209.165.200.225

Trace complete.

C:\>tracert 10.10.10.10

Tracing route to 10.10.10.10 over a maximum of 30 hops:

  1  1 ms      0 ms      1 ms      192.168.30.1
  2  0 ms      1 ms      1 ms      10.10.10.10

Trace complete.

C:\>

```

Conectividad desde PC – A hacia redes de R1

```

C:\>ping 192.168.30.1

Pinging 192.168.30.1 with 32 bytes of data:

Reply from 192.168.30.1: bytes=32 time<lms TTL=255
Reply from 192.168.30.1: bytes=32 time<lms TTL=255
Reply from 192.168.30.1: bytes=32 time<lms TTL=255
Reply from 192.168.30.1: bytes=32 time<lms TTL=255

Ping statistics for 192.168.30.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.40.1

Pinging 192.168.40.1 with 32 bytes of data:

Reply from 192.168.40.1: bytes=32 time=lms TTL=255
Reply from 192.168.40.1: bytes=32 time<lms TTL=255
Reply from 192.168.40.1: bytes=32 time<lms TTL=255
Reply from 192.168.40.1: bytes=32 time=lms TTL=255

Ping statistics for 192.168.40.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = lms, Average = 0ms

C:\>ping 192.168.200.1

Pinging 192.168.200.1 with 32 bytes of data:

Reply from 192.168.200.1: bytes=32 time=lms TTL=255
Reply from 192.168.200.1: bytes=32 time<lms TTL=255
Reply from 192.168.200.1: bytes=32 time<lms TTL=255
Reply from 192.168.200.1: bytes=32 time<lms TTL=255

Ping statistics for 192.168.200.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = lms, Average = 0ms

```


Conectividad desde PC-C hacia R3

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.6.1

Pinging 192.168.6.1 with 32 bytes of data:

Reply from 192.168.6.1: bytes=32 time=3ms TTL=253
Reply from 192.168.6.1: bytes=32 time=3ms TTL=253
Reply from 192.168.6.1: bytes=32 time=2ms TTL=253
Reply from 192.168.6.1: bytes=32 time=3ms TTL=253

Ping statistics for 192.168.6.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\>ping 192.168.5.1

Pinging 192.168.5.1 with 32 bytes of data:

Reply from 192.168.5.1: bytes=32 time=2ms TTL=253
Reply from 192.168.5.1: bytes=32 time=2ms TTL=253
Reply from 192.168.5.1: bytes=32 time=2ms TTL=253
Reply from 192.168.5.1: bytes=32 time=5ms TTL=253

Ping statistics for 192.168.5.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 5ms, Average = 2ms

C:\>ping 192.168.4.1

Pinging 192.168.4.1 with 32 bytes of data:

Reply from 192.168.4.1: bytes=32 time=3ms TTL=253
Reply from 192.168.4.1: bytes=32 time=2ms TTL=253
Reply from 192.168.4.1: bytes=32 time=2ms TTL=253
Reply from 192.168.4.1: bytes=32 time=2ms TTL=253

Ping statistics for 192.168.4.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 3ms, Average = 2ms
```

Conectividad desde PC-C hacia R2

```
C:\>ping 10.10.10.10

Pinging 10.10.10.10 with 32 bytes of data:

Reply from 10.10.10.10: bytes=32 time=1ms TTL=254
Reply from 10.10.10.10: bytes=32 time=1ms TTL=254
Reply from 10.10.10.10: bytes=32 time=10ms TTL=254
Reply from 10.10.10.10: bytes=32 time=2ms TTL=254

Ping statistics for 10.10.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 10ms, Average = 3ms

C:\>ping 209.165.200.224

Pinging 209.165.200.224 with 32 bytes of data:

Reply from 172.31.21.2: bytes=32 time=1ms TTL=254
Reply from 172.31.21.2: bytes=32 time=1ms TTL=254
Reply from 172.31.21.2: bytes=32 time=2ms TTL=254
Reply from 172.31.21.2: bytes=32 time=1ms TTL=254

Ping statistics for 209.165.200.224:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms
```

Conectividad desde PC-C hacia R1

```
C:\>ping 192.168.30.1

Pinging 192.168.30.1 with 32 bytes of data:

Reply from 192.168.30.1: bytes=32 time<1ms TTL=255
Reply from 192.168.30.1: bytes=32 time<1ms TTL=255
Reply from 192.168.30.1: bytes=32 time<1ms TTL=255
Reply from 192.168.30.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.30.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.40.1

Pinging 192.168.40.1 with 32 bytes of data:

Reply from 192.168.40.1: bytes=32 time<1ms TTL=255
Reply from 192.168.40.1: bytes=32 time<1ms TTL=255
Reply from 192.168.40.1: bytes=32 time<1ms TTL=255
Reply from 192.168.40.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.40.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.200.1

Pinging 192.168.200.1 with 32 bytes of data:

Reply from 192.168.200.1: bytes=32 time<1ms TTL=255
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255
Reply from 192.168.200.1: bytes=32 time=1ms TTL=255
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.200.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

12. ARCHIVOS DE CONFIGURACIÓN

Adicional a la configuración requerida en el escenario propuesto, a los equipos de red se les realizó la siguiente configuración: Banners, cifrado de contraseñas, SSH, nombres, direcciones IP de gestión, y accesos para líneas de consola y vty. El siguiente es el archivo de configuración de cada uno de los equipos con componen la red.

ROUTER 1

```
R1#sh run
Building configuration...

Current configuration : 2609 bytes
!
version 12.4
no service timestamps log datetime msec
no service timestamps debug datetime msec
service password-encryption
!
hostname R1
!
enable secret 5 $!$mERr$9cTjUIEqNGurQiFU.ZeCi1
enable password 7 0822455D0A16 !
ip dhcp excluded-address 192.168.30.1 192.168.30.30 ip
dhcp excluded-address 192.168.40.1 192.168.40.30 !
ip dhcp pool ADMINISTRACION
network 192.168.30.0 255.255.255.0
default-router 192.168.30.1

dns-server 10.10.10.11
ip dhcp pool MERCADEO
network 192.168.40.0 255.255.255.0
default-router 192.168.40.1
dns-server 10.10.10.11
```

```
!  
no ip cef  
no ipv6 cef  
!  
username admin secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1  
!  
ip ssh version 2  
ip domain-name ccna-unad.com  
!  
spanning-tree mode pvst  
!  
interface FastEthernet0/0  
description LAN  
no ip address  
duplex auto  
speed auto  
!  
interface FastEthernet0/0.30  
description VLAN Administracion  
encapsulation dot1Q 30  
ip address 192.168.30.1 255.255.255.0  
ip access-group 102 out  
!  
interface FastEthernet0/0.40  
description VLAN Mercadeo  
  
encapsulation dot1Q 40  
ip address 192.168.40.1 255.255.255.0  
ip access-group 101 out  
!  
interface FastEthernet0/0.99  
description VLAN Management  
encapsulation dot1Q 99
```

```
ip address 192.168.99.1 255.255.255.0
!
interface FastEthernet0/0.200
description VLAN Mantenimiento
encapsulation dot1Q 200
ip address 192.168.200.1 255.255.255.0
ip access-group 21 out
!
interface FastEthernet0/1
no ip address
duplex auto
speed auto
shutdown
!
interface Serial0/0/0
description Enlace a R2
bandwidth 128
ip address 172.31.21.1 255.255.255.252
ip ospf cost 7500
clock rate 64000
!
interface Serial0/0/1
no ip address

clock rate 2000000
shutdown
!
interface Vlan1
no ip address
shutdown
!
router ospf 1
router-id 1.1.1.1
```

```
log-adjacency-changes
passive-interface FastEthernet0/0
network 172.31.21.0 0.0.0.3 area 0
network 192.168.30.0 0.0.0.255 area 0
network 192.168.40.0 0.0.0.255 area 0
network 192.168.200.0 0.0.0.255 area 0
network 192.168.99.0 0.0.0.255 area 0
!
ip classless
!
ip flow-export version 9
!
access-list 21 deny 192.168.200.0 0.0.0.255
access-list 21 permit host 0.0.0.0
access-list 101 deny ip 192.168.40.0 0.0.0.255 209.165.200.224 0.0.0.7 access-
list 101 permit ip any any
access-list 102 deny ip 192.168.30.0 0.0.0.255 host 10.10.10.10
access-list 102 permit ip any any !

no cdp run
!

banner motd ^C Acceso solo a personal autorizado ^C !
line con 0
exec-timeout 5 0
password 7 0822455D0A16
login
!
line aux 0
!
line vty 0 4
login local
transport input ssh
```

```
line vty 5 15
login local
transport input ssh
!
end
R1#
```

ROUTER 2

```
R2#sh run
Building configuration...
```

```
Current configuration : 2077 bytes
```

```
!
version 12.4
no service timestamps log datetime msec no
service timestamps debug datetime msec service
password-encryption !

hostname R2
!
enable secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
enable password 7 0822455D0A16 !
no ip cef
no ipv6 cef
!
username admin secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
!
ip ssh version 2
ip domain-name unad-ccna.com
!
spanning-tree mode pvst
!
interface Loopback0
```



```
description Web Server
ip address 10.10.10.10 255.255.255.255
!
interface FastEthernet0/0
description Enlace_ISP
ip address 209.165.200.225 255.255.255.248
ip nat outside
duplex auto
speed auto
!
interface FastEthernet0/1
no ip address
duplex auto
speed auto

shutdown
!
interface Serial0/0/0
description Enlace a R3
bandwidth 128
ip address 172.31.23.1 255.255.255.252
ip ospf cost 7500
ip nat inside
clock rate 64000
!
interface Serial0/0/1
description Enlace a R1
bandwidth 128
ip address 172.31.21.2 255.255.255.252
ip nat inside
!
interface Vlan1
no ip address
```

```
shutdown
!
router ospf 1
router-id 2.2.2.2
log-adjacency-changes
passive-interface FastEthernet0/0
network 172.31.21.0 0.0.0.3 area 0
network 10.10.10.10 0.0.0.0 area 0
network 172.31.23.0 0.0.0.255 area 0
network 209.165.200.224 0.0.0.7 area 0
!
ip nat inside source list 10 interface FastEthernet0/0 overload

ip classless
ip route 0.0.0.0 0.0.0.0 209.165.200.230
!
ip flow-export version 9
!
access-list 10 permit 172.31.21.0 0.0.0.3
access-list 10 permit 172.31.23.0 0.0.0.3
access-list 10 permit host 10.10.10.10
access-list 10 permit 192.168.30.0 0.0.0.255
access-list 10 permit 192.168.40.0 0.0.0.255
access-list 10 permit 192.168.200.0 0.0.0.255
access-list 10 permit 192.168.4.0 0.0.0.255
access-list 10 permit 192.168.5.0 0.0.0.255
access-list 10 permit 192.168.6.0 0.0.0.255
!
no cdp run
!
banner motd ^C Acceso solo a peronal aoturizado ^C
!
line con 0
```

```
exec-timeout 5 0
password 7 0822455D0A16
login
!
line aux 0
!
line vty 0 4
login local
transport input ssh
line vty 5 15

login local
transport input ssh
!
end
```

ROUTER 3

```
R3#sh run
Building configuration...

Current configuration : 1615 bytes
!
version 12.4
no service timestamps log datetime msec no
service timestamps debug datetime msec service
password-encryption !

hostname R3
!
enable secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
enable password 7 0822455D0A16 !
no ip cef
no ipv6 cef
!
```

```
username admin secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
!  
ip ssh version 2  
ip domain-name unad-ccna.com  
!  
spanning-tree mode pvst  
  
!  
interface Loopback4  
ip address 192.168.4.1 255.255.255.0  
!  
interface Loopback5  
ip address 192.168.5.1 255.255.255.0  
!  
interface Loopback6  
ip address 192.168.6.1 255.255.255.0  
!  
interface FastEthernet0/0  
no ip address  
duplex auto  
speed auto  
shutdown  
!  
interface FastEthernet0/1  
no ip address  
duplex auto  
speed auto  
shutdown  
!  
interface Serial0/0/0  
no ip address  
clock rate 2000000  
shutdown
```

```
!  
interface Serial0/0/1  
description Enlace a R2  
bandwidth 128  
  
ip address 172.31.23.2 255.255.255.252  
ip access-group 20 out  
!  
interface Vlan1  
no ip address  
shutdown  
!  
router ospf 1  
router-id 3.3.3.3  
log-adjacency-changes  
passive-interface FastEthernet0/0  
network 172.31.23.0 0.0.0.3 area 0  
network 192.168.4.0 0.0.0.255 area 0  
network 192.168.5.0 0.0.0.255 area 0  
network 192.168.6.0 0.0.0.255 area 0  
!  
ip classless  
!  
ip flow-export version 9  
!  
access-list 20 deny 192.168.6.0 0.0.0.255  
access-list 20 permit host 0.0.0.0  
!  
no cdp run  
!  
banner motd ^C Acceso solo a personal autorizado ^C  
!  
line con 0
```

```
exec-timeout 5 0
password 7 0822455D0A16
```

```
login
!
line aux 0
!
line vty 0 4
login local
transport input ssh
line vty 5 15
login local
transport input ssh
!
end
R3#
```

SWITCH 1

```
SW1#sh run
Building configuration...
```

```
Current configuration : 2521 bytes
```

```
!
version 12.1
no service timestamps log datetime msec no
service timestamps debug datetime msec service
password-encryption !
```

```
hostname SW1
!
enable secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
enable password 7 0822455D0A16 !
```

```
ip ssh version 2
ip domain-name unad-ccna.com
!
username admin secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
!
spanning-tree mode pvst
!
interface FastEthernet0/1
description PC VLAN 30
switchport access vlan 30
switchport mode access
spanning-tree portfast
!
interface FastEthernet0/2
description Sin uso
shutdown
!
interface FastEthernet0/3
description Enlace a SW3
switchport mode trunk
!
interface FastEthernet0/4
description Interfaces sin uso
shutdown
!
interface FastEthernet0/5
description Interfaces sin uso
shutdown
!
interface FastEthernet0/6

description Interfaces sin uso
shutdown
```

```
!  
interface FastEthernet0/7  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/8  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/9  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/10  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/11  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/12  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/13  
description Interfaces sin uso  
shutdown
```



```
!  
interface FastEthernet0/14  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/15  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/16  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/17  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/18  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/19  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/20  
description Interfaces sin uso  
shutdown  
!  
interface FastEthernet0/21
```

```
description Interfaces sin uso
shutdown
!
interface FastEthernet0/22
description Interfaces sin uso
shutdown
!
interface FastEthernet0/23
description Interfaces sin uso
shutdown
!
interface FastEthernet0/24
description Enlace a R1
switchport mode trunk
!
interface Vlan1
no ip address
shutdown
!
interface Vlan99
description Management
mac-address 00d0.5840.3901
ip address 192.168.99.2 255.255.255.0
!
ip default-gateway 192.168.99.1
!
banner motd ^C Acceso solo a personal autorizado ^C
!
line con 0
password 7 0822455D0A16
```

```
login
exec-timeout 5 0
!
line vty 0 4
login local
transport input ssh
line vty 5 15
login local
transport input ssh
!
end
```

SWITCH 3

```
SW3#sh run
Building configuration...
```

```
Current configuration : 2458 bytes
```

```
!
version 12.1
no service timestamps log datetime msec no
service timestamps debug datetime msec service
password-encryption !
```

```
hostname SW3
```

```
!
enable secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
enable password 7 0822455D0A16
```

```
!  
ip ssh version 2  
no ip domain-lookup  
ip domain-name unad-ccna.com  
!  
username admin secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1  
!  
spanning-tree mode pvst  
!  
interface FastEthernet0/1  
description PC VLAN 40  
switchport access vlan 40  
switchport mode access  
spanning-tree portfast  
!  
interface FastEthernet0/2  
description Puerto sin uso  
shutdown  
!  
interface FastEthernet0/3  
description Enlace a SW1  
switchport mode trunk  
!  
interface FastEthernet0/4  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/5  
description Puerto Sin uso  
shutdown
```

```
!  
interface FastEthernet0/6  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/7  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/8  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/9  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/10  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/11  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/12  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/13
```

```
description Puerto Sin uso
shutdown
!
interface FastEthernet0/14
description Puerto Sin uso
shutdown
!
interface FastEthernet0/15
description Puerto Sin uso
shutdown
!
interface FastEthernet0/16
description Puerto Sin uso
shutdown
!
interface FastEthernet0/17
description Puerto Sin uso
shutdown
!
interface FastEthernet0/18
description Puerto Sin uso
shutdown
!
interface FastEthernet0/19
description Puerto Sin uso
shutdown
!
interface FastEthernet0/20
description Puerto Sin uso
shutdown
```

```
!  
interface FastEthernet0/21  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/22  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/23  
description Puerto Sin uso  
shutdown  
!  
interface FastEthernet0/24  
description Puerto Sin uso  
shutdown  
!  
interface Vlan1  
no ip address  
shutdown  
!  
interface Vlan99  
description Management  
mac-address 0090.2b35.9401  
ip address 192.168.99.3 255.255.255.0  
!  
ip default-gateway 192.168.99.1  
!  
banner motd ^C Acceso solo a personal autorizado ^C  
!
```

```
line con 0
password 7 0822455D0A16
login
exec-timeout 5 0
!
line vty 0 4
login local
transport input ssh
line vty 5 15
login local
transport input ssh
!
end
```


Conclusiones

El diseño, la implementación y la administración de un plan de direccionamiento IP eficaz asegura que las redes puedan operar de manera eficaz y eficiente a medida que aumenta la cantidad de conexiones de host a una red.

La clave radica en comprender la estructura jerárquica de la dirección IP y cómo modificar esa jerarquía para lograr una mayor eficiencia en los requisitos de enrutamiento, tamaño, ubicación, uso y acceso, lo cual representa una parte importante en la planificación de un esquema de direccionamiento IP.

Bibliografía

Macfarlane, J. (2014). Network Routing Basics : Understanding IP Routing in Cisco Systems. Recuperado de <http://bibliotecavirtual.unad.edu.co:2048/login?url=http://search.ebscohost.com/login.aspx?direct=true&db=e000xww&AN=158227&lang=es&site=ehost-live>

Lucas, M. (2009). Cisco Routers for the Desperate : Router and Switch Management, the Easy Way. San Francisco: No Starch Press. Recuperado de <https://1drv.ms/b/s!AmIJYei-NT1Im3L74BZ3bpMiXRx0>

Odom, W. (2013). CISCO Press (Ed). CCNA ICND1 Official Exam Certification Guide. Recuperado de <http://ptgmedia.pearsoncmg.com/images/9781587205804/samplepages/9781587205804.pdf>

Odom, W. (2013). CISCO Press (Ed). CCNA ICND2 Official Exam Certification Guide. Recuperado de <http://een.iust.ac.ir/profs/Beheshti/Computer%20networking/Auxiliary%20materials/Cisco-ICND2.pdf>

Lammle, T. (2010). CISCO Press (Ed). Cisco Certified Network Associate Study Guide. Recuperado de <https://1drv.ms/b/s!AmIJYei-NT1Im3GQVfFFrjnEGFFU>

CISCO. (2014). OSPF de una sola área. Principios de Enrutamiento y Conmutación. Recuperado de: <https://static-courseassets.s3.amazonaws.com/RSE50ES/module8/index.html#8.0.1.1>